

ECS 402A

Identification

Example: ECS 402A-3
 E: Glass types
 CS: Chopped Strands
 402A : CPIC sizing reference
 3: Chopped Length(mm)



Product Description

Standard product for thermoset (BMC). Applied in car ashtray, wiper motor and other requirements on fire resistance.

Product Benefits

- Pellet even
- Good flow ability
- Compatible and reactivity well with basic resin
- Excellent mechanical properties

Technical Characteristics


Sizing type	Filament Diameter (μm)	Moisture content (%)	Loss on ignition (%)	Integrity (g)
—	ISO1888	ISO3344	ISO1887	*CPIC/TM-13
Phenolic Resin	10±1	≤0.05	0.8±0.1	≤5

Product Code	Type of Glass	Filament Diameter (μm)	Chopped Length (mm)
ECS402A-1.7 ECS402A-3	E	10	1.7 3

Packaging

- Provide two package methods:
- Super sack bag, easily bottom discharge
- Flexible poly-plastic film bag

Package Method	Package Weight[kg]	Bag number per pallet	Pallet Size [mm]
Super Sack Bag	1000	1	1140*1140*1100
Poly-plastic film bag	25	40	850*500*120

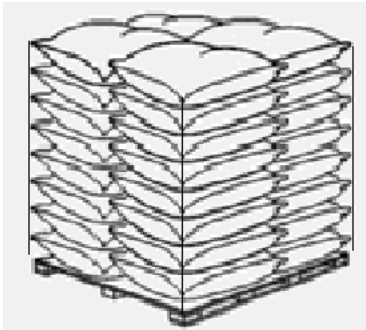

Storage

- If no special requirements, it should be stored in cool and dry place. And the recommended temperature range is 10-30°C, humidity control is 50 -75%.
 - Before use the product should be always kept package encapsulation.
- Pallet stacking height should not be over 1 layer



ISO 9001



ISO 14001



OHSAS 18001

